



A Methodology for Characterizing Barrel Flexure Due to Tank Motion

by Mark Bundy, James Newill, Vince Marcopoli,
Michael Ng, and Charles Wells

ARL-MR-479

June 2000

Approved for public release; distribution is unlimited.

DDIC 01/00/0000000000 0

20000717 055

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5066

ARL-MR-479

June 2000

A Methodology for Characterizing Barrel Flexure Due to Tank Motion

Mark Bundy and James Newill
Weapons and Materials Research Directorate

Vince Marcopoli, Michael Ng, and Charles Wells
General Dynamics Land Systems

Abstract

Barrel centerline curvature is known to influence the location of projectile shot impacts. Superimposed on the unique manufactured barrel centerline is the flexed barrel shape that can occur prior to firing while the tank is on the move. In order to understand and quantify the effects of barrel flexure on gun accuracy, it is necessary to determine what combination of fundamental mode shapes is most likely to occur. A method to accomplish this task is described in this report. The method is demonstrated by enumerating the 10 most likely mode shape combinations (flexed barrel shapes) that were found to occur in an M256 barrel mounted in an M1A2 tank while it traversed the RRC-9 bump course at Aberdeen Proving Ground, MD, at 15 mph.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 2000		3. REPORT TYPE AND DATES COVERED Final, Jul 99 - Jan 00
4. TITLE AND SUBTITLE A Methodology for Characterizing Barrel Flexure Due to Tank Motion			5. FUNDING NUMBERS 1L162618AH80	
6. AUTHOR(S) Mark Bundy, James Newill, Vince Marcopoli,* Michael Ng,* and Charles Wells*				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WM-BC Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-MR-479	
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES * General Dynamics Land Systems Sterling Heights, MI 48312				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Barrel centerline curvature is known to influence the location of projectile shot impacts. Superimposed on the unique manufactured barrel centerline is the flexed barrel shape that can occur prior to firing while the tank is on the move. In order to understand and quantify the effects of barrel flexure on gun accuracy, it is necessary to determine what combination of fundamental mode shapes is most likely to occur. A method to accomplish this task is described in this report. The method is demonstrated by enumerating the 10 most likely mode shape combinations (flexed barrel shapes) that were found to occur in an M256 barrel mounted in an M1A2 tank while it traversed the RRC-9 bump course at Aberdeen Proving Ground, MD, at 15 mph.				
14. SUBJECT TERMS barrel, flexing, firing on the move, mode shapes			15. NUMBER OF PAGES 32	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK

Table of Contents

	<u>Page</u>
Report Documentation Page.....	iii
List of Figures	vii
List of Tables	vii
1. Introduction	1
2. Describing Barrel Motion	4
2.1 Rigid-Body Barrel Motion Due to Vehicle Travel While Target Tracking	5
2.2 Barrel Flexing Modes and Tube Shapes.....	7
3. Barrel Flexing Due to Tank Motion	7
4. Summary and Conclusions.....	13
5. References	15
Distribution List	17

INTENTIONALLY LEFT BLANK

List of Figures

<u>Figure</u>	<u>Page</u>
1. Typical Stationary Firing Results	3
2. Example of Barrel Motion Repeatability for an M256 Barrel Firing M865E3 Training Rounds	3
3. Illustration of Firing-on-the-Move Results From the Same Gun Firing on the Same Day	4
4. Caricature of Rigid-Body Motion of the Sight and Barrel While Target Tracking as the Tank Traverses a Bump	5
5. Rigid-Body Motion of the Barrel (\dot{y}_t and $\dot{\theta}$) Due to Terrain and Actuator Forces	6
6. First Three Fundamental Barrel Flexing Mode Shapes (Normalized to Unity) for the M256 120-mm Barrel	8
7. Typical Mode Shape Amplitudes While Vehicle Is in Motion	8
8. Typical Ratio of q_1/q_2 While Vehicle Is in Motion—An Example of Data Discretization by Banding	9
9. Ratio of q_1/q_2 for an M256 Barrel Traversing RRC-9 Bump Course: (a) Number of Occurrences in 9,000 Samples and (b) Frequency of Occurrence.....	10
10. Frequency of Occurrence and Median Amplitudes for a Given Amplitude Ratio	11
11. Ten Most Likely Barrel Shapes Over Bump Course.....	13
12. Comparison of Most Likely Bump Course Barrel Shapes With the Average Manufactured Shape for an M256 Barrel	14

List of Tables

<u>Table</u>	<u>Page</u>
1. Ten Most Likely Ratios of q_1/q_2	11

INTENTIONALLY LEFT BLANK

1. Introduction

Excluding aiming and pointing errors, tank gun inaccuracy can be compartmentalized into three areas. One source of variation is associated with the ammunition (e.g., variations in the projectile geometry and mass asymmetries and/or chambering differences between rounds). Another source of error arises from factors that can change from occasion to occasion within the same gun system, e.g., the effect of weather conditions such as temperature, sun, wind, and moisture, on component parts like the ammunition (Held, Webb, and Schmidt 1991). A third error category is attributable to variations in the barrel, e.g., wear conditions and/or centerline shape (Wilkerson 1995). This report deals with the latter source of error. In particular, the topic of discussion here is how the barrel centerline shape can be perturbed prior to firing on the move as a result of lateral flexing created by the vehicle motion.

Before proceeding, a brief discussion is in order on how firing on the move differs from static firing. Figure 1 portrays how the three previously mentioned contributors to gun inaccuracy can affect the fall of shot. For instance, the illustration conveys that for a given gun tube firing from a stationary vehicle on a given day, there will be a spread in target impacts (referred to as round-to-round or target impact dispersion [TID]) about a center of impact (COI). Note, even though projectile gravity drop is factored into the muzzle aim point, the COI will not necessarily lie on the target (cross in Figure 1).

The angle subtended at the muzzle between the COI and the expected (gravity corrected) target impact point (cross) is referred to as jump. Jump is primarily due to the effects of lateral and rotational motion imparted to the projectile by the barrel, sabot, and aerodynamic forces before it reaches free flight. Figure 1 (inset) breaks down the jump into a series of directional changes (as enumerated by Bornstein et al. 1988) caused by (1) a difference in the muzzle pointing angle at shot exit relative to the original line of fire, (2) a muzzle transverse (crossing) velocity at shot exit, (3) a transverse velocity of the projectile's center-of-gravity at shot exit relative to the muzzle (cg jump), (4) asymmetric lateral sabot discard forces, and (5) aerodynamic lift forces up to the point of the first maximum in yaw (Bundy 1999).

If the same gun and lot of ammunition were to be fired the next day, all other factors being the same, the impacts would likely be scattered about a different COI; such a shift in COI falls under the category of occasion-to-occasion jump error. On the other hand, if a different barrel was fired from the same tank on the same day with the same lot of ammunition, the scattering of impacts would likely occur about yet another COI; this phenomenon would be recognized as tube-to-tube jump variation.

Using data accumulated from a large number of tank, tube, occasion, and ammunition lots, an all-inclusive (occasion-to-occasion, plus tube-to-tube) mean jump for the entire fleet of tanks has been established and used to make an average/gross correction to the firing aim point for each ammunition type, known as the computer correction factor (CCF).

Firing on the move creates yet another source of error. The effects of varying barrel motion (flexure) due to tank travel are superimposed on the more repeatable barrel motion effects caused by the firing event itself (e.g., Figure 2, Guidos 1999), resulting in an increase in shot scatter. Thus, the moving TID (mTID) will be greater than the stationary TID (sTID), as illustrated in Figure 3.

Issues related to on-the-move firing performance can be subdivided into two parts: (1) prefiring effects, which address the dynamic behavior of the gun tube during on-the-move vehicle operation, and (2) firing effects, which address the in-bore dynamics of the projectile. The focus of this study is limited to the former, but ultimately, it is hoped that the insights gained here will suggest modifications to the fire control system that will improve the overall on-the-move system accuracy.

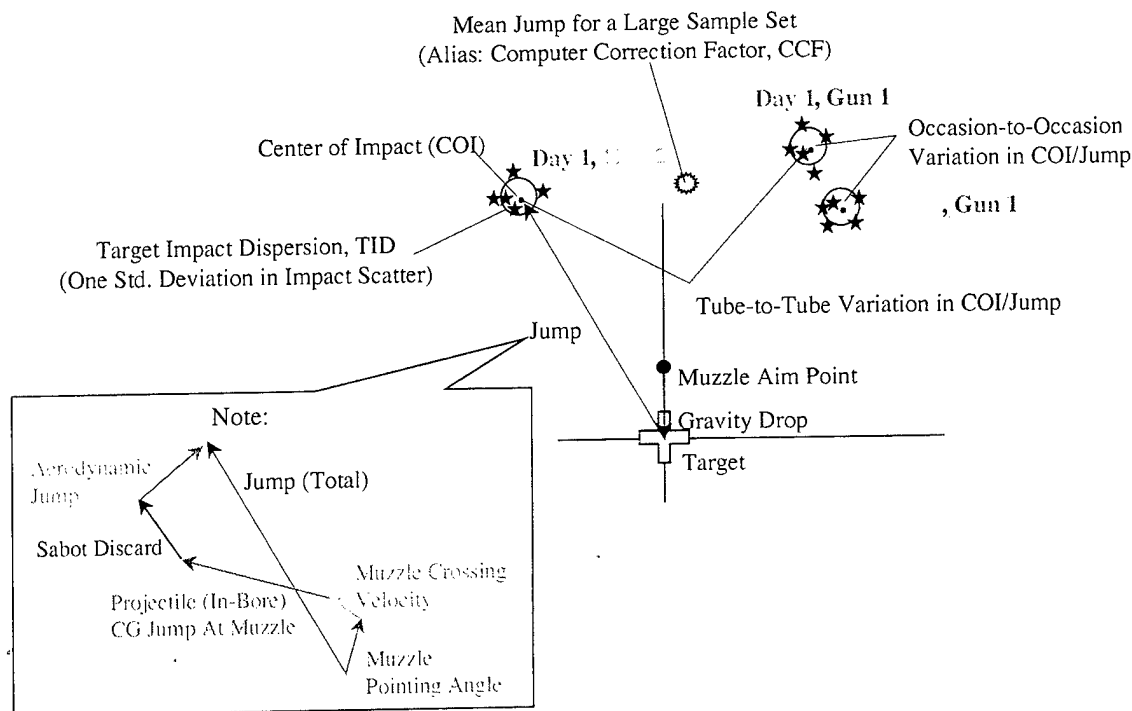


Figure 1. Typical Stationary Firing Results.

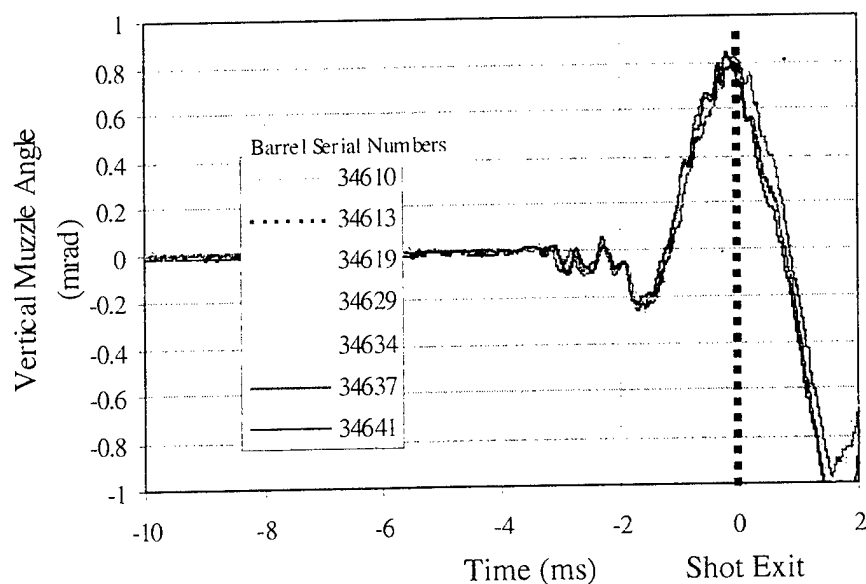


Figure 2. Example of Barrel Motion Repeatability for an M256 Barrel Firing M865E3 Training Rounds (Courtesy of Guidos 1999).

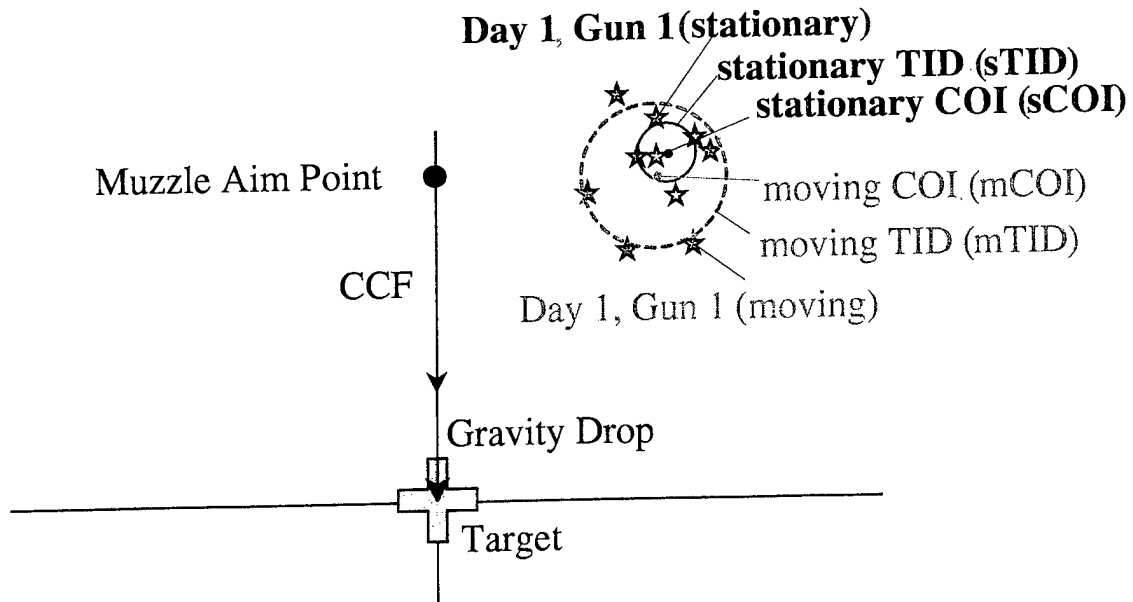


Figure 3. Illustration of Firing-on-the-Move Results From the Same Gun Firing on the Same Day.

2. Describing Barrel Motion

Prefiring barrel motion can be broken down into its rigid-body and flexing mode components as follows:

$$y(x,t) = \overbrace{y_t(t) + \theta(t)[x - x_t]}^{\text{rigid body}} + \underbrace{Y(x,t)}_{\text{flexing mode}}, \quad (1)$$

where y gives the vertical component of the lateral barrel displacement (relative to the static barrel centerline) at time t in an earth-fixed coordinate frame; x specifies the axial barrel coordinate relative to the breech face (x_t is the location of the trunnion); y_t gives the vertical displacement of the trunnion axis; θ specifies the rotation of the barrel about the trunnion axis; and Y gives the vertical component of the lateral barrel displacement (relative to the static barrel centerline) in a coordinate frame that is rotating and translating with the barrel. The flexing mode component, Y , can be further broken down into

$$Y(x,t) = q_1(t) Y_1(x) + q_2(t) Y_2(x) + q_3(t) Y_3(x), \quad (2)$$

where Y_i ($i = 1, 2, 3$) are the first three barrel flexing mode shapes (normalized to unity), and q_i gives the amplitude of each mode shape. It is assumed in Equation 2, and later shown to be the case, that no more than the first three mode shapes are needed to account for barrel flexing from tank motion. The next section discusses the rigid-body terms, θ and y_t .

2.1 Rigid-Body Barrel Motion Due to Vehicle Travel While Target Tracking

Current tank gunnery protocol calls for the periodic checking/adjustment of the gunner's sight line to ensure that it is coincident with the muzzle (bore scope) sight line, when both are aimed at a distant target and the tank is stationary. When targeting an object while the tank is on the move, an angle resolver is used to measure the sight rotation angle, θ , to within ± 10 arc seconds (± 0.05 mrad). (Briefly, an angle resolver functions by measuring induced voltage in a secondary winding as a function of its axial orientation in the field of a primary winding.) Based on the sight resolver output, a force is delivered to the barrel (through a hydraulically controlled piston actuator) that causes the barrel to rotate by the same amount as the sight, as measured by a (second) barrel-angle resolver. The resolver-actuator control is the essence of the current gun stabilization system, intended to keep the line of fire directed at the target, illustrated in Figure 4. As described, maintaining target pointing is critically dependent on the target-following abilities of the gunner (manifest in the sight resolver output); however, new technologies such as auto-tracking have the potential to significantly reduce the demands on the gunner during this process.

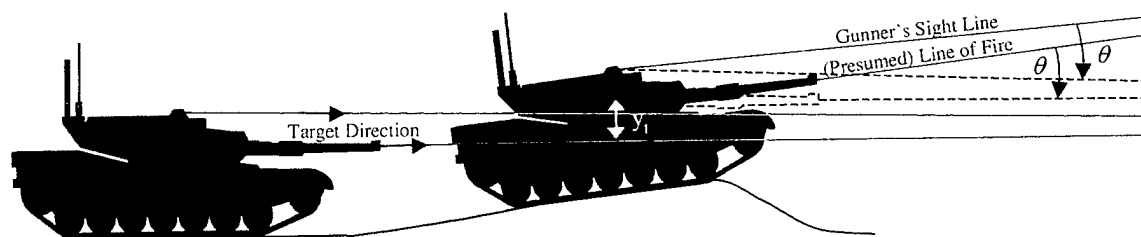


Figure 4. Caricature of Rigid-Body Motion of the Sight and Barrel While Target Tracking as the Tank Traverses a Bump.

The preceding discussion focuses on rigid-body gun pointing as a means of improving accuracy by keeping the line of fire directed at the target while the tank is traversing terrain disturbances that would otherwise cause the barrel to pitch (rotate) up or down. A secondary accuracy issue concerns the lateral velocity (jump) that would be imparted to the projectile at shot exit due to (1) rigid-body translation of the barrel caused by tank travel and (2) actuator-induced rigid-body rotation of the barrel enforced during target tracking. The jump derived from rigid-body translation and rotation for the moving, target-tracking barrel would be superimposed on the aforementioned crossing velocity jump. Knowing and compensating for projectile jump due to vehicle motion and target tracking would improve firing-on-the-move accuracy. The inclusion and use of a vertical plane accelerometer to determine \dot{y}_t , along with a knowledge of $\dot{\theta}$ (from the sight resolver output), could be used to determine such a firing-on-the-move correction angle, $\phi_{rigid-body}$:

$$\phi_{rigid\ body} = \frac{v_{y,muzzle}}{v_{x,muzzle}} = \frac{\dot{y}_t + (x_m - x_t) \dot{\theta}}{v_{x,muzzle}}, \quad (3)$$

where $v_{x,muzzle}$ is the standard launch velocity of the projectile and x_m is the breech-face-to-muzzle distance (note, positive $\hat{\theta}$ will be in the direction from positive \hat{x} to positive \hat{y} , see Figure 5).

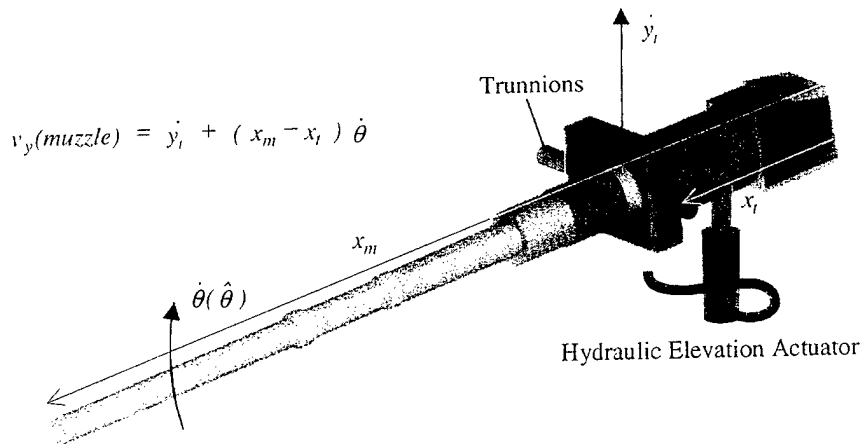


Figure 5. Rigid-Body Motion of the Barrel (\dot{y}_t and $\dot{\theta}$) Due to Terrain and Actuator Forces.

Although it was possible to explicitly describe, via Equation 3, the effects of rigid-body barrel motion on the projectile (caused by target tracking and tank motion), quantifying the effects of barrel flexing on the projectile's flight path is not as easily done. In fact, such detail is not within the scope of the present study; the primary interest here is on how to determine and describe the dominant barrel flexing modes, and possibly conjecture as to their effect on the projectile.

2.2 Barrel Flexing Modes and Tube Shapes

Modeled as a system of point masses connected by spring-like forces, the fundamental barrel flexing modes can be determined by solving the appropriate mass-stiffness matrix. The first three mode shapes for the M256 120-mm barrel are shown in Figure 6; all shapes are normalized to unity. Note, all three mode shapes pass through zero at the location of the trunnions (~53 in, 1.35 m) and actuator (~35 in, 0.89 m), where the point masses are considered to be pinned. Recall, in principle, rigid-body motion accounts for the displacement as well as rotation of the line passing through the actuator and trunnion points (Equation 1), relative to which the mode shapes of Figure 6 are referenced. (In actuality, for modeling barrel mode shapes, it would be more appropriate to consider the barrel pinned at the front and rear load-bearing surfaces within the recoil mount; for simplicity, however, this is not done here.)

3. Barrel Flexing Due to Tank Motion

The shape of the flexed barrel at any given time is determined by the mode shape amplitudes, q_i , according to Equation 2. Figure 7 shows a typical time sample of the mode shape amplitudes for the M256 barrel mounted on the M1A2 tank, traversing the bump course referred to as RRC-9 at Aberdeen Proving Ground, MD. As indicated, the first mode is the dominant one. While traversing RRC-9, the ratio of amplitudes $q_1:q_2:q_3$ was found to be on the order of 25:5:1. This being the case, it is possible to adequately characterize/model flexing of the M256 barrel over this course by summing over just the first two mode shapes in Equation 2.

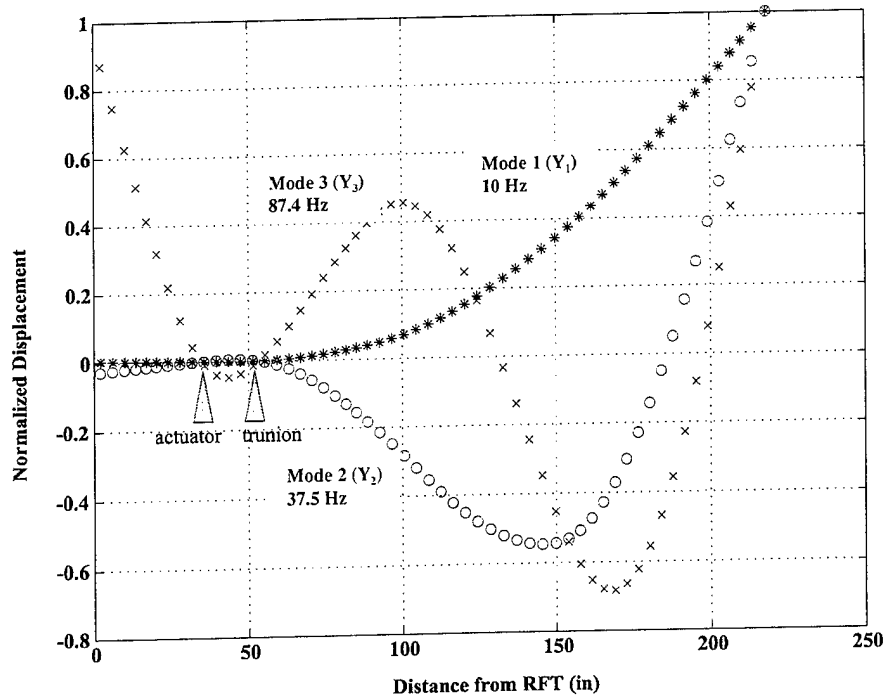


Figure 6. First Three Fundamental Barrel Flexing Mode Shapes (Normalized to Unity) for the M256 120-mm Barrel.

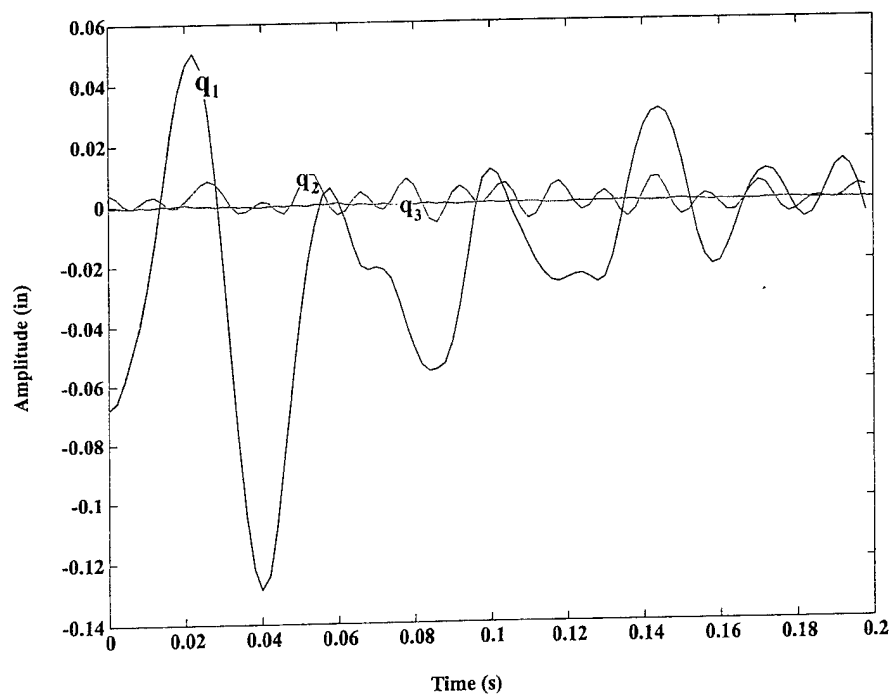


Figure 7. Typical Mode Shape Amplitudes While Vehicle Is in Motion.

Figure 8 illustrates how the ratio of q_1/q_2 can be discretized by counting the number of occasions that a given ratio (within some tolerance band) occurs over a given time span. Figure 9a shows how the distribution of ratios q_1/q_2 varies, over the range from -50 to $+50$ in increments of 1, while an M1A2 tank traversed RRC-9 at 15 mph (taking an elapsed time of 20 s and generating 9,000 data samples). (This type of accounting/plotting will fluctuate somewhat with the points selected and the width of the increments, but in general, trends will be independent of these factors.) For instance, it can be seen from Figure 9a that the value of q_1/q_2 between -1.5 and -0.5 occurred most often, 523 times out of the 9,000 time increments sampled (this same peak location occurred when the sampling was refined tenfold). Figure 9b shows the equivalent results, only plotted in the nondimensional format of frequency-of-occurrence.

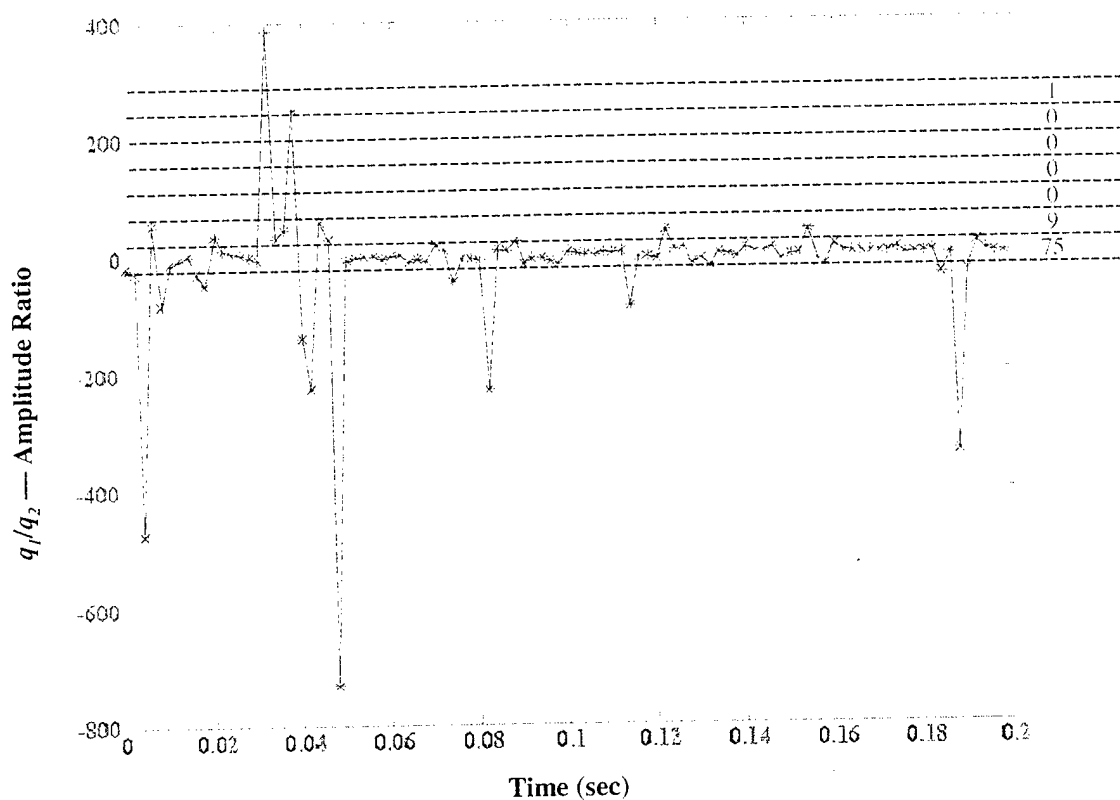


Figure 8. Typical Ratio of q_1/q_2 While Vehicle Is in Motion—An Example of Data Discretization by Banding.

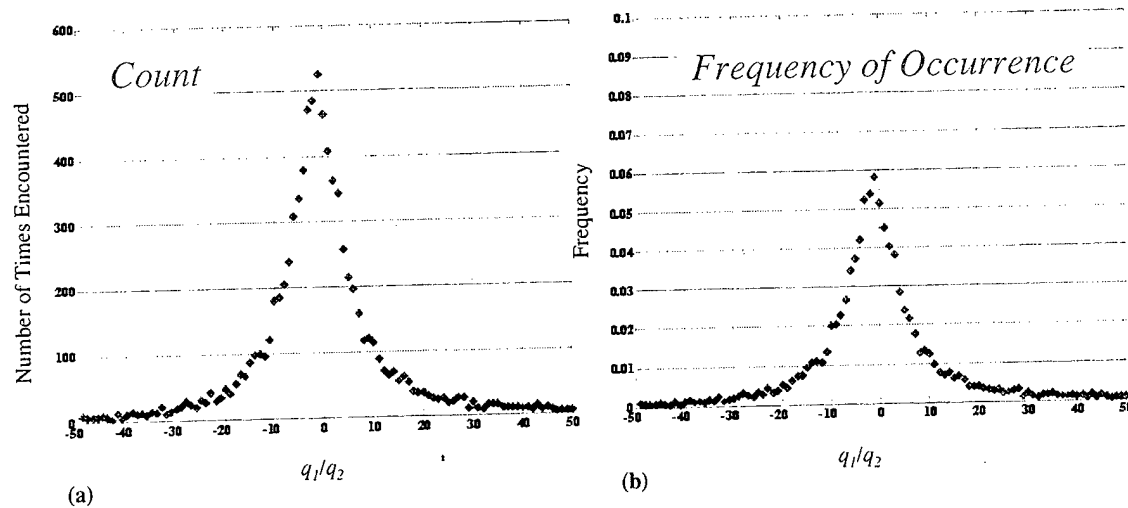


Figure 9. Ratio of q_1/q_2 for an M256 Barrel Traversing RRC-9 Bump Course: (a) Number of Occurrences in 9,000 Samples and (b) Frequency of Occurrence.

There are some underlying subtleties to be aware of in the plot of Figure 9b (or 9a, for that matter) as elaborated upon in Figure 10. In particular, each point on the curve (such as the point where $q_1/q_2 = -1$ and the frequency of occurrence is 5.8%) is determined from a set, S , of ratios q_1/q_2 that are all within $\pm\epsilon$, the band tolerance (e.g., ± 0.5), of the point in question (e.g., out of the 9,000 ratios of q_1/q_2 , 523, or 5.8%, had a value between -1.5 and -0.5). Hence, for each point, median values can be determined for q_1 and q_2 within the corresponding set S . These median values are plotted in Figure 10, as essentially the third dimension of Figure 9b. Before discussing the significance of these median values, it is informative to catalog the 10 most likely ratios of q_1/q_2 , as displayed in Table 1. The top 10 cases are nearly equal in likelihood of occurrence, ranging from a low of 3.4% (case 10) to a high of 5.8% (case 1). However, there is a very gradual trend that shows higher values of q_1/q_2 are less likely to occur; this observation is shown more dramatically in the plots of Figures 9 and 10.

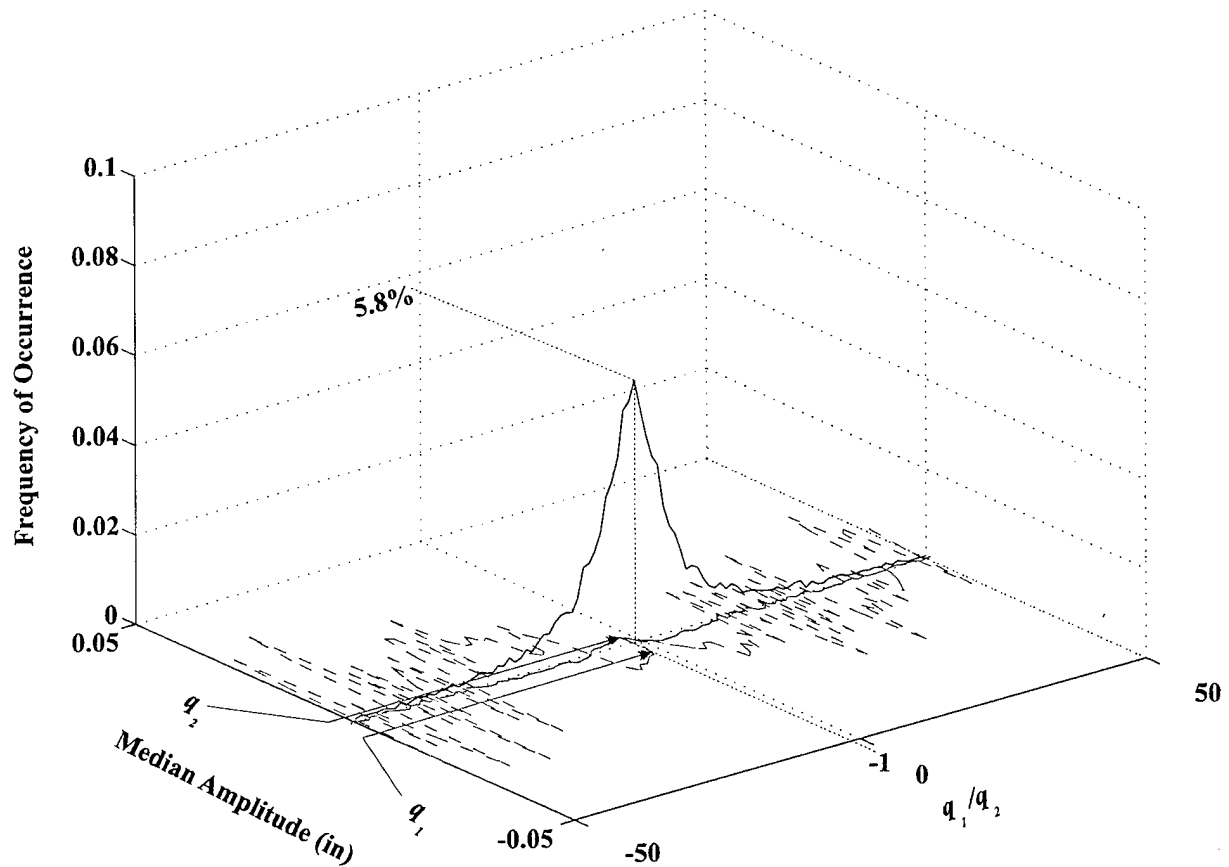


Figure 10. Frequency of Occurrence and Median Amplitudes for a Given Amplitude Ratio.

Table 1. Ten Most Likely Ratios of q_1/q_2

Probability Order	Ratio of q_1/q_2 (± 0.5)	Frequency of q_1/q_2 Occurring (%)	Median Value of q_1 (inches $\times 10^{-3}$)	Median Value of q_2 (inches $\times 10^{-3}$)
1	-1.0	5.8	-1.5	+1.7
2	-2.0	5.4	-5.6	+3.0
3	-3.0	5.2	-5.8	+2.0
4	+0.0	5.2	-0.0	-1.0
5	+1.0	4.5	-0.9	-1.1
6	-4.0	4.2	-6.9	+1.7
7	+2.0	4.0	-4.0	-2.1
8	+3.0	3.8	-5.6	-1.9
9	-5.0	3.7	-8.0	+1.6
10	-6.0	3.4	-7.6	+1.2

Total — 45.2%

From Table 1, it can be seen that the median values of q_2 vary in magnitude from 0.001–0.003 in (0.025–0.076 mm), a fairly uniform grouping, over the top 10 cases, which occur roughly 45% of the time. (For perspective, this range is on the order of the error in current centerline measurement techniques.) Thus, the magnitudes of q_1 will increase as the ratio of q_1/q_2 increases, with the proportionality constant being 0.001–0.003 in. A case in point, for one of the larger ratios in Table 1, $q_1/q_2 = -5$, the magnitude of the median q_1 was 0.008 in. Generalizing, we could expect this magnitude of q_1 to occur roughly 3.7% of the time, with smaller magnitudes of q_1 occurring roughly 40% of the time. From a standpoint of gun accuracy, the larger the magnitude of q_1 (the dominant mode), the larger the possible muzzle deflection angle and angular rate, which generally leads to an increase in the spread of shot impacts. Hence, one option for a fire-inhibit solution might be to fire only when $|q_1|$, or the ratio of $|q_1/q_2|$, is small (e.g., $|q_1/q_2| \leq 4$). How such a fire-inhibit system might be implemented is not within the scope of the current study; the comment is merely made to show the practical significance of the median values of q_1 (and q_2) for any given ratio q_1/q_2 .

Figure 11 shows the barrel flexure profiles corresponding to each of the top 10 ratios listed in Table 1. The most undulating shapes are those with the highest proportion of second mode motion (e.g., cases 1–5). For the most part, the higher amplitude shapes are those dominated by first mode motion (e.g., cases 6–10).

The top 10 tube shapes in Table 1 and Figure 11 were obtained by searching the database of Figure 9b for any case where the frequency of occurrence exceeded 3%. When this search window was broadened to include any case where the probability was greater than 0.5%, 37 ratios were found that met this criterion. These 37 cases, plotted in Figure 12, represent the flexed barrel profile for a combined 82.5% of the bump-course transit time. The spread in peak amplitudes across this group is roughly 0.030 in (0.76 mm). Also shown in Figure 12, for comparison, is the average manufactured centerline shape for the M256 barrel (Wilkerson 1998). For the most part, the spread in manufactured barrel centerlines, as registered by their (peak)

muzzle displacements, spans about 0.100 in (2.5 mm) (i.e., ± 0.050 in [1.25 mm] on either side of the average shown).*

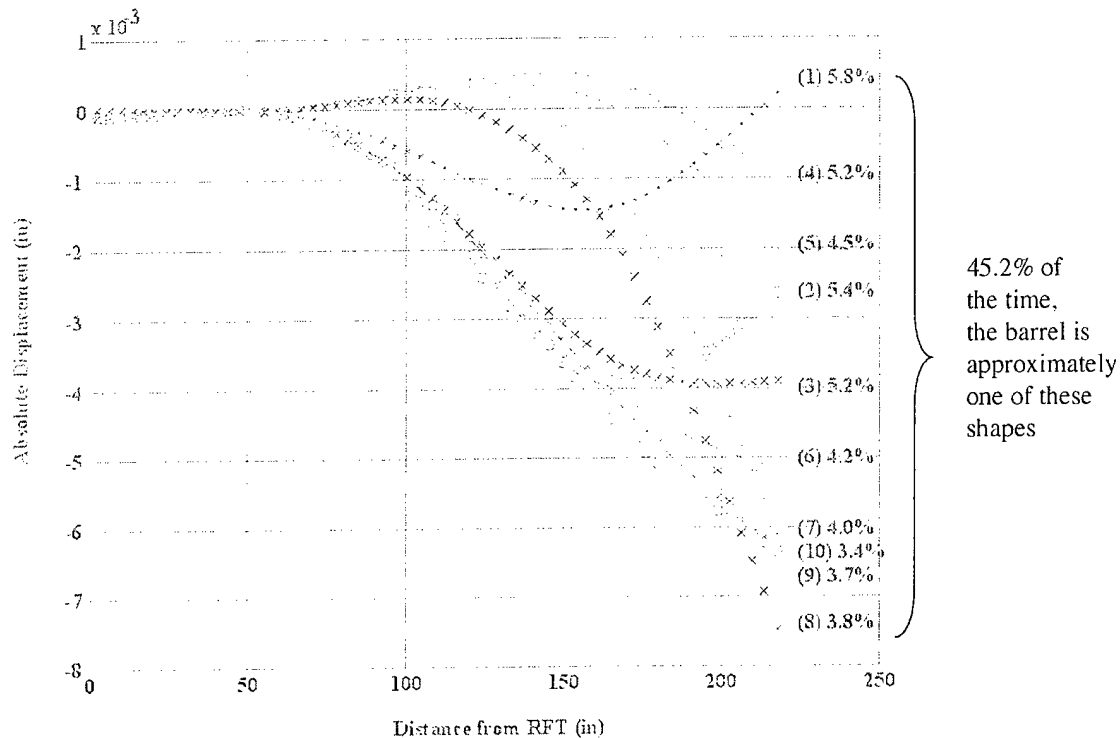


Figure 11. Ten Most Likely Barrel Shapes Over Bump Course.

4. Summary and Conclusions

This report has documented a methodology to assess the superimposable effects of tank motion on the static barrel centerline shape of a rigidly rotating and translating barrel. It has been shown, for example, that for an M256 barrel in an M1A2 tank traversing the RRC-9 bump course at 15 mph, the resulting barrel flexure could be adequately captured by a linear combination of just the first two mode shapes (higher order mode shapes were not a significant factor). For roughly a third (34%) of the bump course transit time, the ratio of the first to second mode amplitudes was ≤ 3 . Moreover, for this mixed-mode group, the median mode shape

* Although the acceptable tolerance in peak muzzle displacement (relative to a straight line) spans 0.160 in (4 mm), most manufactured barrel centerlines fall well within this tolerance limit.

amplitudes were relatively small (for reference, they were typically smaller than three times the magnitude of the current static centerline measurement error). The remaining two-thirds of the time, the barrel was essentially exhibiting first-mode motion, albeit with relatively large amplitude, such that the spread in peak muzzle displacement over more than 80% of the bump course transit time was equivalent to roughly a third of the spread in statically measured muzzle displacements for barrels coming off the current production line.

This later comparison, between the dynamic variation in a given barrel centerline (due to vehicle motion) and the static variation in manufactured barrel centerlines, may permit the inference that the mTID from any given barrel might be on the order of one-third the tube-to-tube-based variation in COIs across the fleet. However, such an inference deserves further substantiation.

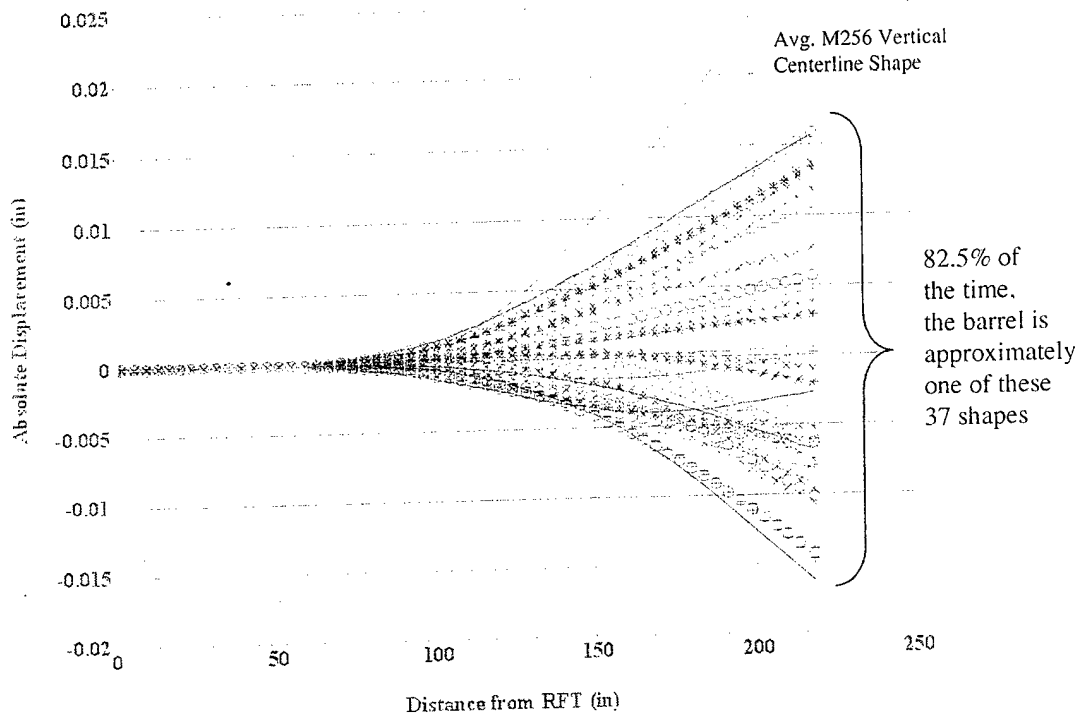


Figure 12. Comparison of Most Likely Bump Course Barrel Shapes With the Average Manufactured Shape for an M256 Barrel.

5. References

- Bornstein, J., I. Celmins, P. Plostins, and E. M. Schmidt. "Techniques for the Measurement of Tank Cannon Jump." BRL-MR-3715, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, December 1988.
- Bundy, M. "The Regional Nature of Aerodynamic Jump." ARL-TR-1872, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, January 1999.
- Guidos, B. J. Private communications on the repeatability of M256 gun dynamics. U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, October 1999.
- Held, B. J., D. W. Webb, and E. M. Schmidt. "Temperature Dependent Jump of the 120-mm M256 Tank Cannon." BRL-MR-3927, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, December 1991.
- Wilkerson, S. "Possible Effects of Gun Tube Straightness on Dispersion." ARL-TR-767, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, June 1995.
- Wilkerson, S. Private communications on the average measured centerline profile for the M256 120-mm barrel. U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, October 1998.

INTENTIONALLY LEFT BLANK

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	DEFENSE TECHNICAL INFORMATION CENTER DTIC DDA 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
1	HQDA DAMO FDT 400 ARMY PENTAGON WASHINGTON DC 20310-0460
1	OSD OUSD(A&T)/ODDDR&E(R) R J TREW THE PENTAGON WASHINGTON DC 20301-7100
1	DPTY CG FOR RDA US ARMY MATERIEL CMD AMCRDA 5001 EISENHOWER AVE ALEXANDRIA VA 22333-0001
1	INST FOR ADVNCD TCHNLGY THE UNIV OF TEXAS AT AUSTIN PO BOX 202797 AUSTIN TX 78720-2797
1	DARPA B KASPAR 3701 N FAIRFAX DR ARLINGTON VA 22203-1714
1	NAVAL SURFACE WARFARE CTR CODE B07 J PENNELLA 17320 DAHLGREN RD BLDG 1470 RM 1101 DAHLGREN VA 22448-5100
1	US MILITARY ACADEMY MATH SCI CTR OF EXCELLENCE DEPT OF MATHEMATICAL SCI MADN MATH THAYER HALL WEST POINT NY 10996-1786

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	DIRECTOR US ARMY RESEARCH LAB AMSRL D D R SMITH 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB AMSRL DD 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CS AS (RECORDS MGMT) 2800 POWDER MILL RD ADELPHI MD 20783-1145
3	DIRECTOR US ARMY RESEARCH LAB AMSRL CI LL 2800 POWDER MILL RD ADELPHI MD 20783-1145
	<u>ABERDEEN PROVING GROUND</u>
4	DIR USARL AMSRL CI LP (BLDG 305)

NO. OF
COPIES ORGANIZATION

1 DIR US ARMY RESEARCH LAB
 AMSRL CP CA D SNIDER
 2800 POWDER MILL RD
 ADELPHI MD 20783

1 CDR US ARMY ARDEC
 AMSTA AR FSE T GORA
 PICATINNY ARSENAL NJ
 07806-5000

3 CDR US ARMY ARDEC
 AMSTA AR TD
 PICATINNY ARSENAL NJ
 07806-5000

5 US ARMY TACOM
 AMSTA JSK
 S GOODMAN
 J FLORENCE
 AMSTA TR D
 B RAJU
 L HINOJOSA
 D OSTBERG
 WARREN MI 48397-5000

5 PM SADARM
 SFAE GCSS SD
 COL B ELLIS
 M DEVINE
 W DEMASSI
 J PRITCHARD
 S HROWNAK
 PICATINNY ARSENAL NJ
 07806-5000

1 CDR US ARMY ARDEC
 F MCLAUGHLIN
 PICATINNY ARSENAL NJ
 07806-5000

5 CDR US ARMY ARDEC
 AMSTA AR CCH
 S MUSALLI
 R CARR
 M LUCIANO
 T LOUZEIRO
 E LOGSDEN
 PICATINNY ARSENAL NJ
 07806-5000

NO. OF
COPIES ORGANIZATION

2 CDR US ARMY ARDEC
 AMSTA AR E FENNELL
 PICATINNY ARSENAL NJ
 07806-5000

1 CDR US ARMY ARDEC
 AMSTA AR CCH
 PICATINNY ARSENAL NJ
 07806-5000

2 CDR US ARMY ARDEC
 AMSTA AR
 PICATINNY ARSENAL NJ
 07806-5000

1 CDR US ARMY ARDEC
 AMSTA AR CCH P
 J LUTZ
 PICATINNY ARSENAL NJ
 07806-5000

1 CDR US ARMY ARDEC
 AMSTA AR FSF T
 C LIVECCHIA
 PICATINNY ARSENAL NJ
 07806-5000

1 CDR US ARMY ARDEC
 AMSTA AR QAC T/C
 C PATEL
 PICATINNY ARSENAL NJ
 07806-5000

2 CDR US ARMY ARDEC
 AMSTA AR M
 D DEMELLA
 F DIORIO
 PICATINNY ARSENAL NJ
 07806-5000

3 CDR US ARMY ARDEC
 AMSTA AR FSA
 A WARNASH
 B MACHAK
 M CHIEFA
 PICATINNY ARSENAL NJ
 07806-5000

NO. OF
COPIES ORGANIZATION

2 CDR US ARMY TRADOC
DIR OF TRNG & DOCTRINE
DEVELOPMENT
DOCTRINE DIVISION
ATZK TDD G
A POMEY
W MEINSHAUSEN
PICATINNY ARSENAL NJ
07806-5000

1 CDR SMCWV QAE Q B VANINA
BLDG 44
WATERVLIET ARSENAL
WATERVLIET NY 12189-4050

1 CDR SMCWV SPM
BLDG 253
T MCCLOSKEY
WATERVLIET ARSENAL
WATERVLIET NY 12189-4050

10 DIR BENET LABORATORIES
AMSTA AR CCB
J KEANE
J BATTAGLIA
J VASILAKIS
R FISCELLA
B COOLEY
V OLMSTEAD
V MONTVORI
G DANDREA
R HASENBEIN
R S SOPOK
WATERVLIET NY 12189

1 CDR WATERVLIET ARSENAL
SMCWV QA QS K INSCO
WATERVLIET NY 12189-4050

1 CDR US ARMY ARDEC
AMSMC PBM K
PICATINNY ARSENAL NJ
07806-5000

1 CDR US ARMY BELVOIR
RD&E CTR
STRBE JBC
FT BELVOIR VA 22060-5606

NO. OF
COPIES ORGANIZATION

2 CDR US ARMY ARDEC
AMSTA AR FSP G
M SCHIKSNIS
D CARLUCCI
PICATINNY ARSENAL NJ
07806-5000

1 US ARMY COLD REGIONS
RSRCH & ENGNRNG LAB
P DUTTA
72 LYME RD
HANOVER NH 03755

1 DIR US ARMY RESEARCH LAB
AMSRL WT
L D WOODBURY
2800 POWDER MILL RD
ADELPHI MD 20783-1145

3 CDR US ARMY MISSILE CMD
AMSMI RD
W MCCORKLE
AMSMI RD ST
P DOYLE
AMSMI RD ST CN
T VANDIVER
REDSTONE ARSENAL AL
35898-5247

2 US ARMY RESEARCH OFFICE
A CROWSON
J CHANDRA
PO BOX 12211
TRIANGLE PARK NC 27709-2211

3 US ARMY RESEARCH OFFICE
ENGINEERING SCIENCES DIV
R SINGLETON
G ANDERSON
K IYER
PO BOX 12211
TRIANGLE PARK NC 27709-2211

NO. OF
COPIES ORGANIZATION

7 PM TMAS
SFAE GSSC TMA
COL PAWLICKI
K KIMKER
C CORDING
D GUZIEWICZI
E KOPACZ
R ROESER
B DORCY
PICATINNY ARSENAL NJ
07806-5000

1 PM TMAS
SFAE GSSC TMA SMD
R KOWALSKI
PICATINNY ARSENAL NJ
07806-5000

2 PEO FA SYSTEMS
SFAE FAS PM
H GOLDMAN
T MCWILLIAMS
PICATINNY ARSENAL NJ
07806-5000

2 PM CRUSADER
G DELCOCO
J SHIELDS
PICATINNY ARSENAL NJ
07806-5000

2 NASA LANGLEY RSRCH CTR
MS 266
AMSRL VS
W ELBER
F BARTLETT JR
HAMPTON VA 23681-0001

2 CDR
DARPA
J KELLY
B WILCOX
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

1 CDR BASE
WL MLBM
2941 P STREET STE 1
WRIGHT PATTERSON AFB OH 45433

NO. OF
COPIES ORGANIZATION

1 NSWC
DAHLGREN DIV
CODE G06
DAHLGREN VA 22448

1 NAVAL RESEARCH LAB
CODE 6383
I WOLOCK
WASHINGTON DC 20375-5000

1 OFFICE OF NAVAL RESEARCH
MECH DIV CODE 1132SM
YAPA RAJAPAKSE
ARLINGTON VA 22217

1 NSWC
CRANE DIV
M JOHNSON
CODE 20H4
LOUISVILLE KY 40214-5245

1 D TAYLOR RESEARCH CTR
SHIP STRUCTURES AND
PROTECTION DEPT
J CORRADO CODE 1702
BETHESDA MD 20084

2 D TAYLOR RESEARCH CTR
R ROCKWELL
W PHYLLAIER
BETHESDA MD 20054-5000

1 DEF SPECIAL WPNS AGENCY
INNOVATIVE CONCEPTS DIV
R ROHR
6801 TELEGRAPH RD
ALEXANDRIA VA 22310-3398

1 OFFICE OF NAVAL RESEARCH
D SIEGEL 351
800 N QUINCY ST
ARLINGTON VA 22217-5660

1 NSWC
J H FRANCIS
CODE G30
DAHLGREN VA 22448

NO. OF
COPIES ORGANIZATION

2 NSW
CODE G32
D WILSON
R D COOPER
DAHLGREN VA 22448

4 NSW
CODE G33
J FRAYSSE
E ROWE
T DURAN
L D SIMONE
DAHLGREN VA 22448

1 CDR, NAVAL SEA SYS CMD
D LIESE
2531 JEFFERSON DAVIS HWY
ARLINGTON VA 22242-5160

1 NSW
M E LACY CODE B02
17320 DAHLGREN RD
DAHLGREN VA 22448

1 NSW
TECH LIBRARY CODE 323
17320 DAHLGREN RD
DAHLGREN VA 22448

4 DIRECTOR
L LIVERMORE NATL LAB
R CHRISTENSEN
S DETERESA
F MAGNESS
M FINGER
PO BOX 808
LIVERMORE CA 94550

1 LOS ALAMOS NATL LAB
F ADDESSIO
MS B216
PO BOX 1633
LOS ALAMOS NM 87545

1 LOS ALAMOS NATL LAB
J REPPA MS F668
PO BOX 1663
LOS ALAMOS NM 87545

NO. OF
COPIES ORGANIZATION

1 OAK RIDGE NATL LAB
R M DAVIS
PO BOX 2008
OAK RIDGE TN 37831-6195

1 PENN STATE UNIV
C BAKIS
227 N HAMMOND
UNIVERSITY PARK PA 16802

3 UDLP
4800 EAST RIVER RD
P JANKE MS170
T GIOVANETTI MS236
B VAN WYK MS389
MINNEAPOLIS MN 55421-1498

4 DIR SANDIA NATL LAB
APPLIED MECHANICS DEPT
DIV 8241
W KAWAHARA
K PERANO
D DAWSON
P NIELAN
PO BOX 969
LIVERMORE CA 94550-0096

1 DREXEL UNIV
A S D WANG
32ND & CHESTNUT ST.
PHILADELPHIA PA 19104

1 BATTELLE
C R HARGREAVES
505 KING AVE
COLUMBUS OH 43201-2681

1 PACIFIC NORTHWEST LAB
M SMITH
PO BOX 999
RICHLAND WA 99352

1 L LIVERMORE NATL LAB
M MURPHY
PO BOX 808 L 282
LIVERMORE CA 94550

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	NORTH CAROLINA STATE UNIV CIVIL ENGINEERING DEPT W RASDORF PO BOX 7908 RALEIGH NC 27696-7908
1	PENN STATE UNIV R MCNITT 227 HAMMOND BLDG UNIVERSITY PARK PA 16802
1	PENN STATE UNIV R S ENGEL 245 HAMMOND BLDG UNIVERSITY PARK PA 16801
1	PURDUE UNIV SCHOOL OF AERO & ASTRO C T SUN W LAFAYETTE IN 47907-1282
1	STANFORD UNIV DEPT OF AERONAUTICS AND AEROBALLISTICS DURANT BLDG S TSAI STANFORD CA 94305
1	UCLA, MANE DEPT ENGR IV H T HAHN LOS ANGELES CA 90024-1597
2	U OF DAYTON RSRCH INST R Y KIM A K ROY 300 COLLEGE PARK AVE DAYTON OH 45469-0168
1	UNIV OF DAYTON J M WHITNEY COLLEGE PARK AVE DAYTON OH 45469-0240
2	UNIV OF DELAWARE CTR FOR COMPOSITE MATERIALS J GILLESPIE M SANTARE 201 SPENCER LAB NEWARK DE 19716

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	U OF ILLINOIS AT URBANA CHAMPAIGN NATL CTR FOR COMP MATRLS RSCH 216 TALBOT LABORATORY J ECONOMY 104 S WRIGHT STREET URBANA IL 61801
1	UNIV OF KENTUCKY L PENN 763 ANDERSON HALL LEXINGTON KY 40506-0046
1	UNIV OF UTAH DEPT OF MECH AND IND ENGR S SWANSON SALT LAKE CITY UT 84112
2	THE U OF TEXAS AT AUSTIN CTR FOR ELECTROMECHANICS A WALLS J KITZMILLER 10100 BURNET RD AUSTIN TX 78758-4497
3	VA POLYTECHNICAL INST & STATE UNIV DEPT OF ESM M W HYER K REIFSNIDER R JONES BLACKSBURG VA 24061-0219
1	UNIV OF MARYLAND DEPT OF AEROSPACE ENG A J VIZZINI COLLEGE PARK MD 20742
1	AAI CORPORATION T G STASTNY PO BOX 126 HUNT VALLEY MD 21030-0126
1	J HEBERT PO BOX 1072 HUNT VALLEY MD 21030-0126

NO. OF
COPIES ORGANIZATION

1 ARMTEC DEFENSE PRODUCTS
 S DYER
 85 901 AVE 53
 PO BOX 848
 COACHELLA CA 92236

2 ADV COMP MATERIALS CORP
 P HOOD
 J RHODES
 1525 S BUNCOMBE RD
 GREER SC 29651-9208

1 SAIC
 D DAKIN
 2200 POWELL ST STE 1090
 EMERYVILLE CA 94608

1 SAIC
 M PALMER
 2109 AIR PARK RD S E
 ALBUQUERQUE NM 87106

1 SAIC
 R ACEBAL
 1225 JOHNSON FERRY RD
 STE 100
 MARIETTA GA 30068

1 SAIC
 G CHRYSSOMALLIS
 3800 W 80TH STREET
 STE 1090
 BLOOMINGTON MN 55431

6 ALLIANT TECHSYSTEMS INC
 C CANDLAND
 R BECKER
 C AAKHUS
 D KAMDAR
 M HISSONG
 R DOHRN
 600 2ND ST NE
 HOPKINS MN 55343-8367

NO. OF
COPIES ORGANIZATION

6 ALLIANT TECHSYSTEMS INC
 J CONDON
 E LYNAM
 J GERHARD
 M WHITE
 L HERIOT
 G HUTCHERSON
 PO BOX 210
 ROCKET CENTER WV
 26726-0210

1 AMOCO PERF PRODUCTS INC
 M MICHNO JR
 4500 MCGINNIS FERRY RD
 ALPHARETTA GA 30202-3944

1 APPLIED COMPOSITES
 W GRISCH
 333 NORTH SIXTH ST
 ST CHARLES IL 60174

1 BRUNSWICK DEFENSE
 T HARRIS
 STE 410
 1745 JEFFERSON DAVIS HWY
 ARLINGTON VA 22202

1 PROJECTILE TECHNOLOGY INC
 515 GILES ST
 HAVRE DE GRACE MD 21078

1 CUSTOM ANALY ENGR SYS INC
 A ALEXANDER
 13000 TENSOR LANE NE
 FLINTSTONE MD 21530

1 NOESIS INC
 A BOUTZ
 1110 N GLEBE RD STE 250
 ARLINGTON VA 22201-4795

1 ARROW TECH ASSOC
 1233 SHELBURNE RD STE D 8
 SOUTH BURLINGTON VT
 05403-7700

1 NSWC
 R HUBBARD G33 C
 DAHLGREN DIV
 DAHLGREN VA 22448-5000

NO. OF
COPIES ORGANIZATION

5 GEN CORP AEROJET
D PILLASCH
T COULTER
C FLYNN
D RUBAREZUL
M GREINER
1100 WEST HOLLYVALE ST
AZUSA CA 91702-0296

7 CIVIL ENGR RSRCH FOUND
H BERNSTEIN
C MAGNELL
K ALMOND
R BELLE
M WILLETT
E DELO
B MATTES
1015 15TH ST NW STE 600
WASHINGTON DC 20005

1 NATL INST OF STANDARD AND TECH
STRUCTURE AND MECH GROUP
POLYMER DIV POLYMERS
RM A209
G MCKENNA
GAITHERSBURG MD 20899

1 DUPONT CO
COMPOSITES ARAMID FIBERS
S BORLESKE
CHESNUT RUN PLAZA
PO BOX 80702
WILMINGTON DE 19880-0702

4 GENERAL DYNAMICS
LAND SYSTEMS DIV
D BARTLE
M NG
V MARCOPOLI
C WELLS
PO BOX 1901
WARREN MI 48090

3 HERCULES INC
G KUEBELER
J VERMEYCHUK
B MANDERVILLE JR
HERCULES PLAZA
WILMINGTON DE 19894

NO. OF
COPIES ORGANIZATION

1 HEXCEL
M SHELENDICH
11555 DUBLIN BLVD
PO BOX 2312
DUBLIN CA 94568-0705

4 INST FOR ADVANCED TECH
H FAIR
P SULLIVAN
W REINECKE
I MCNAB
4030 2 W BRAKER LN
AUSTIN TX 78759

1 INTEGRATED COMP TECHN
H PERKINSON JR
PO BOX 397
YORK NEW SALEM PA
17371-0397

1 INTERFEROMETRICS INC
R LARRIVA (V P)
8150 LEESBURG PIKE
VIENNA VA 22100

1 AEROSPACE RES & DEV CORP
D ELDER
PO BOX 49472
COLORADO SPRINGS CO
80949-9472

1 PM ADVANCED CONCEPTS
LORAL VOUGHT SYSTEMS
J TAYLOR
PO BOX 650003
MS WT 21
DALLAS TX 76265-0003

2 LORAL VOUGHT SYSTEMS
G JACKSON
K COOK
1701 W MARSHALL DR
GRAND PRAIRIE TX 75051

1 BRIGS CO
J BACKOFEN
2668 PETERBOROUGH ST
HERDON VA 22071-2443

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	SOUTHWEST RSRCH INST ENGR & MAT SCIENCES DIV J RIEGEL 6220 CULEBRA RD PO DRAWER 28510 SAN ANTONIO TX 78228-0510
1	ZERNOW TECH SERVICES L ZERNOW 425 W BONITA AVE STE 208 SAN DIMAS CA 91773
1	R EICHELBERGER 409 W CATHERINE ST BEL AIR MD 21014-3613
1	DYNA EAST CORP PEI CHI CHOU 3201 ARCH ST PHILADELPHIA PA 19104-2711
2	MARTIN MARIETTA CORP P DEWAR L SPONAR 230 EAST GODDARD BLVD KING OF PRUSSIA PA 19406
3	PRIMEX CORP FLINCHBAUGH DIV E STEINER B STEWART D OSMENT PO BOX 127 RED LION PA 17356
1	PRIMEX CORP L WHITMORE 10101 9TH ST NORTH ST PETERSBURG FL 33702
1	RENNSAELER POLYTECH INST PITTSBURGH BLDG PRESIDENT OFC R B PIPES TROY NY 12180-3590
1	SPARTA INC J GLATZ 9455 TOWNE CTR DRIVE SAN DIEGO CA 92121-1964

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	UNITED DEFENSE LP P PARA G THOMAS 1107 COLEMAN AVE BOX 367 SAN JOSE CA 95103
1	MARINE CORPS SYSTEMS CMD PM GROUND WPNS COL R OWEN 2083 BARNETT AVE STE 315 QUANTICO VA 22134-5000
1	OFFICE OF NAVAL RES J KELLY 800 NORTH QUINCEY ST ARLINGTON VA 22217-5000
2	NSWC CARDEROCK DIV R CRANE CODE 2802 C WILLIAMS CODE 6553 3A LEGGETT CIR ANNAPOLIS MD 21402
5	SIKORSKY H BUTTS T CARSTENSAN B KAY S GARBO J ADELMANN 6900 MAIN ST PO BOX 9729 STRATFORD CT 06601-1381
1	U WYOMING D ADAMS PO BOX 3295 LARAMIE WY 82071
1	MICHIGAN STATE UNIV R AVERILL 3515 EB MSM DEPT EAST LANSING MI 48824-1226
1	AMOCO POLYMERS J BANISAUkas 4500 MCGINNIS FERRY RD ALPHARETTA GA 30005

NO. OF
COPIES ORGANIZATION

1 HEXCEL
T BITZER
11711 DUBLIN BLVD
DUBLIN CA 94568

1 BOEING
R BOHLMANN
PO BOX 516 MC 5021322
ST LOUIS MO 63166-0516

1 NAVSEA OJRI
G CAMPONESCHI
2351 JEFFERSON DAVIS HWY
ARLINGTON VA 22242-5160

1 LOCKHEED MARTIN
R FIELDS
1195 IRWIN CT
WINTER SPRINGS FL 32708

1 USAF
WL/MLSM OL A HAKIM
5225 BAILEY LOOP 243E
MCCLELLAN AFB CA 55552

1 PRATT & WHITNEY
D HAMBRICK
400 MAIN ST MS 114 37
EAST HARTFORD CT 06108

1 BOEING
DOUGLAS PRODUCTS DIV
L J HART SMITH
D800 0019
3855 LAKEWOOD BLVD
LONG BEACH CA 90846-0001

1 MIT
P LAGACE
77 MASS AVE
CAMBRIDGE MA 01887

1 NASA LANGLEY
J MASTERS
MS 389
HAMPTON VA 23662-5225

NO. OF
COPIES ORGANIZATION

1 CYTEC
M LIN
1440 N KRAEMER BLVD
ANAHEIM CA 92806

2 BOEING ROTORCRAFT
P MINGURT
P HANDEL
800 B PUTNAM BLVD
WALLINGFORD PA 19086

2 FAA TECH CENTER
D OPLINGER AAR 431
P SHYPRYKEVICH AAR 431
ATLANTIC CITY NJ 08405

1 NASA LANGLEY RC
CC POE MS 188E
NEWPORT NEWS VA 23608

1 LOCKHEED MARTIN
S REEVE
8650 COBB DR
D/73 62 MZ 0648
MARIETTA GA 30063-0648

1 WL MLBC
E SHINN
2941 PST STE 1
WRIGHT PAT AFB OH
45433-7750

1 IIT RESERACH CTR
D ROSE
201 MILL ST
ROME NY 13440-6916

1 MATERIALS SCIENCES CORP
B W ROSEN
500 OFFICE CTR DR STE 250
FT WASHINGTON PA 19034

1 DOW UT
S TIDRICK
15 STERLING DR
WALLINGFORD CT 06492

NO. OF
COPIES ORGANIZATION

3 TUSKEGEE UNIV
MATERIALS RSRCH LAB
SCHOOL OF ENGR & ARCH
S JEELANI
H MAHFUZ
U VAIDYA
TUSKEGEE AL 36088

4 NIST
POLYMERS DIV
R PARNAS
J DUNKERS
M VANLANDINGHAM
D HUNSTON
GAITHERSBURG MD 20899

2 NORTHROP GRUMMAN
ENVIRONMENTAL PROGRAMS
R OSTERMAN
8900 E WASHINGTON BLVD
PICO RIVERA CA 90660

1 OAK RIDGE NATL LAB
A WERESZCZAK
BLDG 4515 MS 6069
PO BOX 2008
OAKRIDGE TN 37831-6064

1 CDR USARDEC
INDUSTRIAL ECOLOGY CTR
T SACHAR
BLDG 172
PICATINNY ARSENAL NJ
07806-5000

1 CDR USA ATCOM
AVIATION APPLIED TECH DIR
J SCHUCK
FT EUSTIS VA 23604

1 CDR USARDEC
AMSTA AR SRE D YEE
PICATINNY ARSENAL NJ
07806-5000

NO. OF
COPIES ORGANIZATION

7 CDR USARDEC
AMSTA AR CCH B
B KONRAD
E RIVERA
G EUSTICE
S PATEL
G WAGNECZ
R SAYER
F CHANG
BLDG 65
PICATINNY ARSENAL NJ
07806-5000

1 CDR USARDEC
AMSTA AR QAC T
D RIGOGLIOSO
BLDG 354 M829E3 IPT
PICATINNY ARSENAL NJ
07806-5000

ABERDEEN PROVING GROUND

62 DIR USARL
AMSRL CI
AMSRL CI C
W STUREK
AMSRL CI CB
R KASTE
AMSRL CI S
A MARK
AMSRL SL B
AMSRL SL BA
AMSRL SL BL
D BELY
AMSRL SL I
AMSRL WM
A HORST
E SCHMIDT
D VIECHNICK
G HAGNAUER
J MCCAULEY
AMSRL WM BE
G WREN
C LEVERITT
D KOOKER

NO. OF
COPIES ORGANIZATION

ABERDEEN PROVING GROUND
CONT

AMSRL WM BD
P PLOSTINS
D LYON
J NEWILL
S WILKERSON
M BUNDY (3 CPS)
J GARNER
R FIFER
B FORCH
R PESCE RODRIGUEZ
B RICE
AMSRL WM MA
R SHUFORD
S MCKNIGHT
AMSRL WM MB
B BURNS
W DRYSDALE
L BURTON
D HOPKINS
C HOPPEL
R KASTE
G GAZONAS
R LIEB
J TZENG
T BOGETTI
B FINK
D GRANVILLE
D SPAGNUOLO
W SPURGEON
M BERMAN
A FRYDMAN
AMSRL WM MC
J BEATTY
AMSRL WM MD
W ROY
W DE ROSSET
AMSRL WM T
D DIETRICH
AMSRL WM TA
W GILLICH
E RAPACKI
T HAVEL
AMSRL WM TC
R COATES
AMSRL WM TD
W BRUCHEY
A DAS GUPTA

NO. OF
COPIES ORGANIZATION

AMSRL WM BA
W D AMICO
AMSRL WM BR
J BORNSTEIN
AMSRL WM TE
A NIILER
AMSRL WM BF
J LACETERA

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number/Author ARL-MR-479 (Bundy) Date of Report June 2000
2. Date Report Received _____
3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT
ADDRESS

Organization

Name

E-mail Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)